

product description: The T-piece is used to branch of cable trays running through JUPITER cable trays or cable ladders of the same width. To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with F surface finish. These items can also be ordered in a varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)









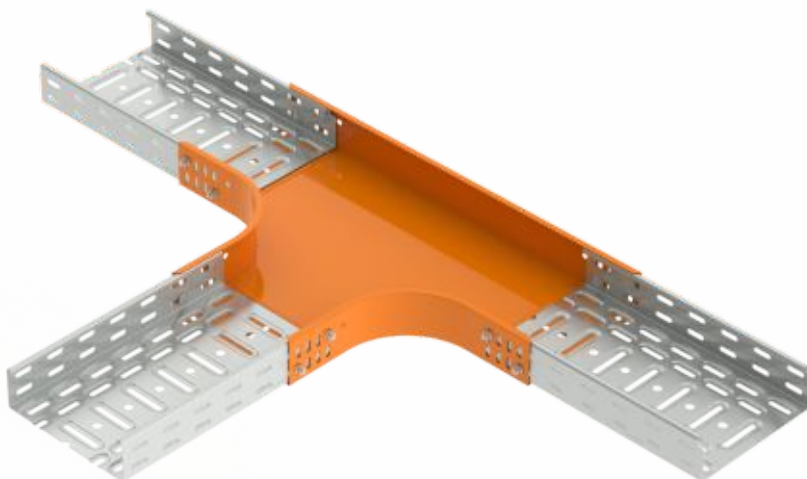





















sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification : ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
 products are approved for standard constructions
 products are approved for non-standard constructions

storage: ČSN EN 60721-3-1



type number	for width of cable tray (mm)	for height of cable tray (mm)	B (mm)	C (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pc)	
T 35X50_S	50	35	253	453	0,8	0,74	12	
T 35X50_F	50	35	253	453	0,8	0,85	12	
T 35X75_S	75	35	278	478	0,8	0,86	12	
T 35X75_F	75	35	278	478	0,8	1,00	12	
T 35X100_S	100	35	303	503	0,8	0,99	12	
T 35X100_F	100	35	303	503	0,8	1,15	12	
T 35X150_S	150	35	353	553	0,8	1,27	12	
T 35X150_F	150	35	353	553	0,8	1,48	12	
T 35X200_S	200	35	403	603	1,0	1,89	15	
T 35X200_F	200	35	403	603	1,0	2,20	15	
T 35X300_S	300	35	503	703	1,0	2,81	15	
T 35X300_F	300	35	503	703	1,0	3,26	15	
T 35X400_S	400	35	603	803	1,0	3,09	18	
T 35X400_F	400	35	603	803	1,0	4,52	18	
T 35X500_S	500	35	703	903	1,0	5,12	18	
T 35X500_F	500	35	703	903	1,0	5,90	18	
T 35X600_S	600	35	803	1003	1,0	7,76	18	
T 35X600_F	600	35	803	1003	1,0	9,31	18	
T 60X50_S	50	60	253	453	0,8	0,88	12	
T 60X50_F	50	60	253	453	0,8	1,02	12	
T 60X75_S	75	60	278	478	0,8	1,07	12	
T 60X75_F	75	60	278	478	0,8	1,17	12	
T 60X100_S	100	60	303	503	0,8	1,14	12	
T 60X100_F	100	60	303	503	0,8	1,33	12	
T 60X150_S	150	60	353	553	0,8	1,43	12	
T 60X150_F	150	60	353	553	0,8	1,66	12	
T 60X200_S	200	60	403	603	1,0	2,08	15	
T 60X200_F	200	60	403	603	1,0	2,42	15	
T 60X300_S	300	60	503	703	1,0	3,02	15	
T 60X300_F	300	60	503	703	1,0	3,51	15	
T 60X400_S	400	60	603	803	1,0	4,13	18	
T 60X400_F	400	60	603	803	1,0	4,79	18	
T 60X500_S	500	60	703	903	1,0	5,34	18	
T 60X500_F	500	60	703	903	1,0	6,24	18	
T 60X600_S	600	60	803	1003	1,2	8,07	18	
T 60X600_F	600	60	803	1003	1,2	9,36	18	
T 85X100_S	100	85	303	503	0,8	1,45	24	
T 85X100_F	100	85	303	503	0,8	1,68	24	
T 85X150_S	150	85	353	553	0,8	1,93	24	
T 85X150_F	150	85	353	553	0,8	2,24	24	
T 85X200_S	200	85	403	603	1,0	2,43	27	
T 85X200_F	200	85	403	603	1,0	2,82	27	
T 85X300_S	300	85	503	703	1,0	3,39	27	
T 85X300_F	300	85	503	703	1,0	3,93	27	
T 85X400_S	400	85	603	803	1,0	4,51	30	
T 85X400_F	400	85	603	803	1,0	5,23	30	
T 85X500_S	500	85	703	903	1,0	5,78	30	
T 85X500_F	500	85	703	903	1,0	6,70	30	
T 85X600_S	600	85	803	1003	1,2	8,37	30	
T 85X600_F	600	85	803	1003	1,2	9,70	30	
T 110X150_S	150	110	353	553	0,8	1,86	24	
T 110X150_F	150	110	353	553	0,8	2,15	24	
T 110X200_S	200	110	403	603	1,0	2,57	27	
T 110X200_F	200	110	403	603	1,0	2,98	27	
T 110X300_S	300	110	503	703	1,0	3,55	27	
T 110X300_F	300	110	503	703	1,0	4,12	27	
T 110X400_S	400	110	603	803	1,0	4,60	30	
T 110X400_F	400	110	603	803	1,0	5,34	30	
T 110X500_S	500	110	703	903	1,0	5,98	30	
T 110X500_F	500	110	703	903	1,0	6,94	30	
T 110X600_S	600	110	803	1003	1,2	8,71	30	
T 110X600_F	600	110	803	1003	1,2	10,11	30	